

3300 SERIES

3300 Injector 4W-7017 Technical File

States Stat

1. 4W-7017 Injector Introduction
1.1. 4W-7017 Injector Basic Information1
1.2. 4W-7017 Injector Common Part Number1
1.3. 4W-7017 Injector Part Number Common Writing
1.4. 4W-7017 Injector Parameter
1,5. 4W-7017 Injector Specifications and Dimensions2
1.6. 4W-7017 Injector Quality Control2
1.7.4W-7017 Injector Customized Service 2
1.8. 4W-7017 Injector Packing List and Package Size
1.9. 4W-7017 Injector Testing Standard and Certificate4
1.10. 4W-7017 Injector Warranty Instructions.
1.10. 4W-7017 Injector Warranty Instructions. 4 1.11. 4W-7017 Injector Manufacturer 5
2. 4W-7017 Injector Technical Support
2. 4W-7017 Injector Technical Support 5 2.1. 4W-7017 Injector Part Number Location 6
2.2. 4W-7017 Injector Installation
2.3. 4W-7017 Injector Reasons of Not Working Normally
2.3. 4W-7017 Injector Reasons of Not Working Normally 7 2.4. 4W-7017 Injector Causes to Damage 7
2.5. 4W-7017 Injector Technical Support Obtaining Methods7
3. 4W-7017 Injector Purchase and Delivery
3.1.4W-7017 Injector Purchase Payment Term
3.2. 4W-7017 Injector Main Sales Markets 8 3.3. 4W-7017 Injector Declaration Requirements 8
2.4. AW-7017 Injector Shipping Ways 8
3.5. 4W-7017 Injector Lead time
3.6.4W-7017 Injector Logistics Time for Destination Out of China's Areas
3.7. 4W-7017 Injector Packing
4. 4W-7017 Injector Storage Standard
5. Company Information
5.1. Company Introduction
5.2. Contact Information12
6. Copyright Statement
aloge, alo
and all all all all all all all all all al
SAVERIL SATERIL
aller
in its its its its its its its its its

3300 Injector 4W-7017 Technical File - SROFF

 $\mathfrak{P}^{h^{j}}$

st^{utti} 1. 4W-7017 Injector Introduction

4 4 14747 2042	in the second	그 같은 것 같은 것 같은 것 같이 많이
111/1.0.7017	Injoctor Raci	c Information
	THECUUT DAM	с ниот шаноп

Ch.	Title	24		(China ma	ade nev	w 3300 injector 4W-7	017 fue	l injector		
	SKU 1	÷	-5	15	100	10	G1F100004W7017	-0	-05	15	10

1.2. 4W-7017 Injector Common Part Number

(1) Injector Exchange Information

Injector Part Number	Re-manufactured Par Number	Replacement Number	OE Number
4W-7017	OR-1744	Barn Para Barn	Bar Bar Bar
4W7017	0R1744	ster stor st	der der de
	OR-3421		
and the shaft shaft.	0R3421	and and and a	and all all all all

(2) 4W-7017 Matching Information

Car model	Engine	Engine	Engine	Engine	Engine	Engine 5	ξ
ENGINE - TRUCK	3406B	Store.	3	81 ⁶⁰⁰⁰ - 31	er er	Store .	st ^{el}
WHEELED BULLDOZER	824C	8245	C Sterry	31 ⁰⁰⁰ -3	STATE STA	SPECT SPECIFIC	; st ⁸¹
WHEEL-TYPE LOADER	980C	980F	980F II	and the	-		5
NON-ROAD TRUCK	772B	773B	775B	store s	10 ⁰⁰ - 30 ⁷⁰	Share -	98 ⁶
GRADER TO MARTIN	16G	16H NA	SPARAT.	ali ^{gan Ci} al	WEIGHT SHE	CARE SHARES	i Ste
ROAD RECLAIMER	RM-350	RR-250	SM-350	SS-250		· ***	¢
WHEELED SELF-PROPELLED SCRAPER	621E	621F	623E	623F	627E	627F	ça (h
ARTICULATED UNLOADING TRUCK	D400D	D40D	T SPANNET	SPATIAN S	and and and	CALL STREEMENT	i A
ENGINE - INDUSTRIAL	3406B	3406C	3408C	3408	3408B	HT400	ç
EARTHWORK COMPACTOR	825	826C	825C	st ^{ow} s	str str	37 ^{2,500}	S.
MARINE PRODUCTS	3406B	ATT SALART	The second	SHUTTER S	NUMBER OF	RANT SPRINT	i Sl ^{eji}
EXCAVATOR	245	245B	245D	200			ç
ENGINE - GENERATOR SET	3406B	-310,000	31000 ·	3,020. 3	1. St.	SHEER	9 ⁸⁰

NUT THE REAL 1.3. 4W-7017 Injector Part Number Common Writing 4W-7017, 4W 7017, 4W7017, 0R-1744, 0R 1744, 0R1744, 0R-3421, 0R 3421, 0R3421

1.4. 4W-7017 Injector Parameter Adaptation System: HEUI SYSTEM Injector Series: 3300 Series and things . 188⁴⁵

Mob/Whatsapp: +86 13410541523 Email :<u>ruby@shumatt.com</u> © 2023 Shenzhen Shumatt Technology Co., Ltd Tel: +8675523215133 Website : www.shumatt.com

Injector Type: Mechanical Injector

Vehicle Configuration Information: 3300 Engines

1.5. 4W-7017 Injector Specifications and Dimensions

Injector Size: 20cm* 3.5cm *3.5cm =245cm³ (L*W*H=V) Injector Net Weight: 0.32kg

Injector Gross Weight: 0.4kg

Injector Quality: China Made New

Package Size: 22cm* 4cm *4cm = 352cm³

Injector Type: Diesel Common Rail Injector MOQ: 4 Pieces

1.6. 4W-7017 Injector Quality Control

(1) Injector Testing

All injector spare parts are tested for electrical characteristics, accuracy, high temperature, low A.I. temperature, withstand voltage, leakage, durability, and various working conditions.

(2) Injector Assembling

And the quality control of the injector production and installation process, our company strictly follows the standard product installation data and product installation steps to install, such as injector stroke test, injector solenoid valve tightening torque, injector nozzle tightening torque. SALERY

(3) Injector Inspection

The factory inspection of the injector is undergone full inspection, random inspection, and batch inspection three inspections. Different brands of test benches are used to test the same fuel injector for a total of no less than three times for factory inspection, and the fuel injector installation testing environment are progressed in dust-free workshop.

1.7. 4W-7017 Injector Customized Service

(1) Injector Customized Service: Meet the customized needs of OEM manufacturers for shell lettering, logo engraving, injector internal packaging, injector external packaging and labels customized, etc.



(2) Injector Customized Service Requirements:

The purchased of customized injector are not less than 10 pieces.

1.75 FT Customized injector packages no less than 1000 pieces. 6.9387 Customized products involve the need of specify logo, the OEM manufacturer needs to provide trademark authorization and the sample of logo image file.

A Once the customized fuel injector is sold, it cannot be returned or exchanged if there is no quality problems.

 a^{2i}

SHUMFITT Shenzhen Shumatt Technology Co., Ltd

SAMET	SPET SPEC
	and and

1.8. 4W-7017 Injector Packing List and Package Size

	7 Injector Packing List and Pacl pare Parts List	kage Size	STRATT STRATT STRATT
No.	1	2	3
SHAREST' SHAR	r" r"	<i>3</i>	5
Image	* *		
SPAINT SPAIN	r n n R	× **	
Name	Injector Assy	Nozzle Protective Cover Cap	Intake hole Cover Cap
Description	Injector Assy Fuel injector part number 4W-7017	Protect nozzle holes from being polluted and blocked	Protect the oil inlet hole from pollution and blockage
No.	4	5	6
STUDDI'S STUD	et et	2	SPACENT SPACENT SPACENT SP
Image	of production of all and all all all all all all all all all al		STREETS STREETS STREETS
Name	VCI Anti-rust Bag	Injector Packing Box	B. B. B.
Description	Prevent fuel injector from rusting	Package for injector and injector accessories	and and and a

and the state of the 2.303.17 A.MATT 25275 - 1 A Minors are forbidden to use the fuel injector assembly, O-ring, gasket, nozzle protective cover, fuel

injector house protective cover, solenoid valve protective cover, VCI anti-rust bag, and air bubble bag to avoid personal injury.

O-ring and gasket are disposable installation accessories, and need to be replaced for re-installation.

100 1000 1000 15 C 65 - C de la 61 ⁽⁵ -5 - E A The nozzle protective cover, the injector house protective cover, and the solenoid valve protective

cover are recyclable accessories that can be reused.

CORT? NONT? 1000 - 1000 - 1 ALTONIC . 2.2000 all all all VCI anti-rust bags and bubble bags are non-degradable materials, please dispose of them properly

States of States of States of St

after using.

 $S^{(j)}$

SPRIME SPAINST SHIDING SPARSANT SHERNET SHERNET SH A The injector and the installation parts should be coated with appropriate sealing oil during Startinstallation. Start Start Start Start Start Start



4 cm 22 cm 4 cm	(2) Injector Box Size									
22 cm		~	a .a	~	~	~	~	~	~	~
		4 cm						1		
4 cm					22 cm			3		
	4	cm								

No.	Name	Injector Package Size (cm)	n Star
1	Injector Box	22*4*4	

1.9. 4W-7017 Injector Testing Standard and Certificate

We can provide the factory quality inspection test report of each injector to ensure that each injector delivered meets the engine performance indicators.

the second second	1. St. 19. 19.			1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		- T		<u> </u>	- 10 March -	1.44.0		1.10.102.01	1. Oct. 103 (2017)	
State.	State.	Store.	States.	9	BOTEN		3643	815	4.04.3010	0.40.01	Star	Style.	Stores.	$\phi_{ij}^{(0)}$
SPARAT	T STRATT	SPR.555	T STREET	ŝ	2011 102 102		64	ц.		-	SPARAT	S.R.S.S.F.	S STATIST	(i Stri
SPANDER	n Stanna	T STRUCT	SPREAM	si .	112. 112. APRIL:			*1			NT SPANN	T SPANIST	SPERAR	त इन्हे
STUDAT	n Stanna	T SPECTOR	5 51935797	s St.	UR BA		42.00				NT SPUTPT	" SPERIOR	5 592,005	6 51 ²
				s.	courtes bas- actes		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		011100 011110 011111 011111 011111		NT SHUDDIN	T SPRINT	T SPRINT	17 191 ⁹⁶
Studiet	SPLONT	312,0017	5 318-8975	ŝ			1124				SPUDIN	SPARA	SPREED	d Ste
Stutions of	SPR. DON	312.0057	T SPLEONT	3	1000	De De De	CHER.	1000		_	TT SPARST	S. P. STOR	SPR.205	a Ste

1.10. 4W-7017 Injector Warranty Instructions

1.10. 4W-7017 Injector Warranty Instructions (1) Product Warranty Conditions and Instructions

It is necessary to provide pictures, videos, or test reports detected by the injector inspection equipment when the injector is abnormal during use as evidence to feed back to the salesman.

Abnormal conditions are properly explained such as: 1.Smoke, 2. Engine shake, 3. Difficulty starting the aS StRUMBIT SHARROW SHUDBER SHADONT SPUDATI engine, 4. Engine noise, 5. oil leakage etc.

(2) Injector Warranty Coverage

Within 15 days after customer receives the 4W-7017 injector, if there is a performance failure and the product has no appearance damage, customer can choose to replace it or repair it; as a second s

If the 4W-7017 injector has performance problems during the warranty period (6-12 months), and it is confirmed that it is product's problems after testing, you can contact our salesmen to replace the same model or a reworked product with the same performance for free;

If the injector house has obvious scratches, it can only be repaired and it will be returned as it is if the product is confirmed to be fault-free. A. 300

Lips: For products not covered by warranty, our company can provide paid maintenance services. For products after paid repaired, the same performance problem will have a free warranty period within 3 months from the date of repairing. ALTERT SPRING

(3) Injector Out of Warranty Coverage

The warranty period has expired.

Injector failure caused by high temperature, high pressure, humidity, rain and snow, saline-alkali land, earthquake, and used in abnormal environment.

Customer disassembles or repairs the injector personally resulting in damage to the injector.

Injector damage caused by man-made reasons (throwing, strong magnetic field magnetization, set fire). Injector failure or injector damage caused by non-injector design, technology, manufacturing, quality A STATE - A STATE 2.57275 and other issues.

Injector failure due to system pressure exceeding system approved pressure.

Injector failure caused by system voltage exceeding approved voltage. 12

a C 1779 Injector failure caused by impurities (water, lead, aluminum powder, iron powder, sulfide) in the system fuel exceeding the standard requirements.

Injector failure caused by not installing according to the tightening torque specified in the vehicle engine maintenance manual (the tightening torque is too large or too small).

Injector failure caused by not following the installation angle specified in the vehicle engine $\sim c h^{50}$ maintenance manual.

Injector failure caused by not following the cleaning requirements specified in the vehicle engine 450055 maintenance manual.

Injector failure caused by failure to replace consumable parts as specified in the vehicle engine maintenance manual. 15 -55 1000 at the at Sec. at C

Injector failure caused by not complying with the intake system fit clearance and exhaust system fit clearance requirements specified in the vehicle engine maintenance manual.

Failure to replace the consumable parts and the fitting clearance of the oil inlet system pipeline and the fuel injector connection in accordance with the fuel intake system specified in the vehicle engine maintenance manual. 1200157 05.53 90⁶⁵⁷

-state

1.11. 4W-7017 Injector Manufacturer

Injector manufacturer: Shenzhen Shumatt Technology Co., Ltd

2. 4W-7017 Injector Technical Support $\sim 10^{10}$


Straw Straw Straw Straw Straw

Mob/Whatsapp: +86 13410541523 Email :ruby@shumatt.com © 2023 Shenzhen Shumatt Technology Co., Ltd

. all . all .

2.1. 4W-7017 Injector Part Number Location

1) E.g.: The injector part number see as follows

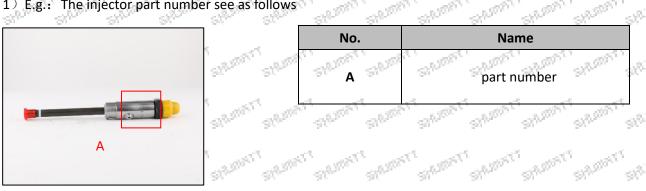

2.2. 4W-7017 Injector Installation (1) 4W-7017 Injector Installation Precautions:

🔺 The replacement of the fuel injector must strictly follow the electrical system, the approved pressure of the low-pressure fuel intake system, the approved pressure of the high-pressure fuel circuit system, and fuel system replacement consumables requirements (including the low-pressure fuel circuit system filter and the 53⁰1 high-pressure fuel circuit) specified in the vehicle engine maintenance manual;

Replacement of wearing parts of the fuel system, cleaning requirements for the connection between the fuel system and the injector, the fitting clearance of the fuel injector connection, the installation angle and tightening torque of the injector, the fitting clearance of the intake system, and the fitting clearance of the exhaust system to ensure the service life of the engine and the normal operation of the injector.

A When installing the fuel injector on the engine, it is necessary to clean the engine block, cylinder head and other parts connected to the fuel injector, and ensure that there is no dust, carbon deposits, water, rust spots, etc.

A Before installing, check whether the fuel injector nozzle gasket has been replaced and installed on the SPREEDENTY SPREAME SPRENDERT SPREAT Stelling 1 SPERMENT SPACED fuel injector.

A When installing the fuel injector, apply lubricant between the fuel injector, fuel nozzle sealing gasket THERE THERE THERE THERE THERE THERE THERE THERE A.S. and O-ring.

A Without replacing new gasket can lead to: deformation of the tight cap of nozzle, deformation of nozzle, deformation of nozzle orifice, oil leakage and air leakage, which will cause serious damage to the fuel injector and nozzle to break and cause damage to the engine.

 $-S_{\rm gas}$ A When installing the injector on the engine, please carefully check the components related to the installation of the injector, such as the injector pressure plate, screw, injector rod and other accessories are not deformed, and install it in strict accordance with the operation steps of the engine maintenance manual. de de The A It is forbidden to operate the bare injector for a long time in an environment with serious dust

pollution and corrosion to iron products.

It is forbidden to operate the bare injector for a long time in a strong magnetic field environment. π^{0} -31.500 SAUSE

2.3. 4W-7017 Injector Reasons of Not Working Normally

- (1) There is air in the oil circuit of the engine fuel system.
- (2) Vehicle oil pump oil supply system is not normal.
- (3) Engine common rail system oil leakage or pressure limiting valve damage.
- (4) There is a short circuit, cutting out and poor contact in the wiring harness connected to the fuel injector of the vehicle.
- (5) The long-term placement of the injector causes the anti-rust oil to solidify, and the internal
- components are stuck or the oil holes are blocked.

A Before installing, carefully check whether other components in the common rail system except the fuel injector are damaged so as to prevent the fuel injector from not working properly after being replaced.

2.4. 4W-7017 Injector Causes to Damage

- (1) Don't operate properly according to engine maintenance manual during dis-assembly or installation, resulting in damage to the injector 18 S. S.
- (2) The fuel oil used for the vehicle does not meet the standard cause damage to the injector, such as: the water content in the fuel oil exceeds the standard, iron powder, aluminum powder, sulfide impurities Starter. SPIRE 3200 exceed the standard, etc.
- (3) The engine is not regularly maintained according to the engine maintenance manual (please refer to the vehicle maintenance manual for the maintenance mileage). For example, failure to replace the
- lubricating oil of the engine system for a long time will cause abnormal wear of the engine, excessive exhaust gas volume or a large amount of carbon deposits inside the engine. The filter is not replaced
- during maintenance or the replaced filter cannot reach the original filter standard. all above reasons can cause damage to the injector.
- (4) The abrasion of the oil pump produces iron powder and aluminum powder enter the fuel injector and cause damage to the fuel injector.
- (5) The deformation and abrasion of fuel tank result in iron powder or aluminum powder entering the fuel SAL SAL injector and causing damage to the fuel injector.
- (6) The fuel injector is damaged due to replacement or adjustment of the relevant parts of the fuel injector. For example, the valve clearance does not meet the standard after the engine is repaired, the replacement or modification of the wiring harness connected to the injector fails to meet the original standard.
- (7) The engine is overheated and overloaded for a long time working results in damage to the fuel injector.
- (8) The injector will be damaged naturally at the end of its working life.
- (9) The injector is magnetized (injector parts' magnetic exceeded) causing the injector to not work properly.

A Before replacing the fuel injector, please check the engine parts carefully according to the engine maintenance manual to avoid the fuel injector being damaged again after replacement. ANTERST'S

SALESS C 2.5. 4W-7017 Injector Technical Support Obtaining Methods

(1) Injector Technical File, visit http://shumatt.com to get the technical file.

Mob/Whatsapp: +86 13410541523 Email :ruby@shumatt.com © 2023 Shenzhen Shumatt Technology Co., Ltd

(2) Injector Technical Videos

Facebook: Visit https://www.facebook.com/hison.li to get the technical videos, constantly follow can get more information.

YouTube: https://www.youtube.com/channel/UCByvYBx7VjV mAfxh Hu-aw to get the technical videos, constantly follow can get more information.

Shumatt: Visit http://shumatt.com to get the technical videos.

(3) Injector Information Query Software

TruckBook Parts EPC APP, Android/Apple App Store download and install, visit http://shumatt.com to get the download and installation tutorial. 100 $\mathcal{F}_{2,n}$

(4) Search The fuel injector test data through TruckBook Parts EPC APP.

de la

3. 4W-7017 Injector Purchase and Delivery

3.1.4W-7017 Injector Purchase Payment Term

Payment Terms: T/T, PayPal, Alipay, WeChat

Please contact our salesmen for specific payment information.

3.2. 4W-7017 Injector Main Sales Markets

Injector main sales markets: Asia, Europe, North America, South America, Africa etc.

3.3. 4W-7017 Injector Declaration Requirements

AUDIT Shumatt can assist customers to provide the following documents for import customs clearance: contract, invoice, packing list, bill of lading, insurance policy, certificate of origin, etc.

STR. TOR

- 50^{70,000}

3.4. 4W-7017 Injector Shipping Ways

Destination in China areas: SF Express, Debon Express, the corresponding logistics company can be provided according to customer requirements in special cases.

Destinations out of China's areas: DHL, UPS, FedEx, TNT air, ocean or other shipping methods required by customers.

3.5. 4W-7017 Injector Lead time

Lead time: Send out within 3 – 7 working days after receiving payment (Except for special products and special cases).

3.6.4W-7017 Injector Logistics Time for Destination Out of China's Areas

DHL Logistics Time:	all a second	\$3, ⁰⁰⁰	\$3,000 °	-32	0.	-910-00	200	Sur.	Store.	Stor.	25
Country or Region of Departure	Hong Kong, China		Countries or ons of Asia		Aus	stralia and N Zealand	lew	Europe	America	Other Countries	
China's Mainland	7 Days	S.	7 Days	-3	Chen.	8 Days	$\mathcal{L}_{\mathcal{C}}$	8 Days	8-12 Days	7-10 Days	$\mathcal{A}^{(2)}$

UPS Logistics Time: Country or Region of Departure: China's Mainland

OI O EODIOCICO		negion of Departure			10 A
Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time
Japan	3 Days	UK	5-7Days	Egypt	5-7 Days
Turkey	5-7 Days	Singapore	3 Days	Switzerland	5-7 Days
Bahrain	5-7 Days	Latvia	7-10 Days	New Zealand	7-10 Days
Sri Lanka	5-7 Days	Thailand	3 Days	Austria	5-7 Days
Romania	5-7 Days	Vietnam	3-5 Days	Estonia	5-7 Days
Malaysia	3-5 Days	Israel	5-7 Days	Mexico	7-10 Days

Mob/Whatsapp: +86 13410541523 Email :ruby@shumatt.com © 2023 Shenzhen Shumatt Technology Co., Ltd Tel: +8675523215133 Website : www.shumatt.com

France	5-7 Days	America	5-7 Days	United Arab Emirates	5-7 Days	
Italy	5-7 Days	Netherlands	5-7 Days	Bengat	7-10 Days	. 18
Lebanon	5-7 Days	Philippine	3-5 Days	Greece	7-10 Days	0% ⁽
South Korea	3 Days	Spain	5-7 Days	Myanmar	5-7 Days	
Canada	5-7 Days	Germany	5-7 Days	Saudi Arabia	7-10 Days	9 ⁸⁵
Portugal	5-7 Days	Australia	5-7 Days	South Africa	7-10 Days	
Denmark	5-7 Days	Belgium	5-7 Days	Ukraine	7-10 Days	$\phi^{(i)}$
India	7-10 Days	Qatar	7-10 Days	Poland	5-7 Days	
Indonesia	3-5 Days	Morocco	7-10 Days	Pakistan	7-10 Days	age.
Kuwait	7-10 Days				200 A	

The logistics time is for reference only, subjects are according to the actual arrival.

3.7. 4W-7017 Injector Packing

Domestic express packaging: Usually wrapped in waterproof scotch tape, such as picture No.2. **International express packaging:** Wrapped with waterproof yellow tape After wrapping the black protective film, such as picture No. 3.

Pallet Shipping: Use fumigation free and recycling trays that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties for the outside, such as picture No. 4,also, the products can be packaged according to customers' requirements.

A The packing tray is made of plastic and can be recycled.

A Transparent tape, yellow tape, black wrapping protective film, white wrapping protective film are

non-degradable materials, please dispose of them properly.

Minors are prohibited from using transparent tape, yellow tape, black wrapping protective film, and white wrapping protective film to avoid personal injury.



Pic No. 1 Domestic express packaging: Wrapped by Transparent tape

International express packaging: Wrapped with yellow tape after wrapping black protective film

Mob/Whatsapp: +86 13410541523 Email :<u>ruby@shumatt.com</u> © 2023 Shenzhen Shumatt Technology Co., Ltd Tel: +8675523215133 Website : www.shumatt.com

9/14



Pic No. 3

Pallet Shipping: Use pallet that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties

-A.S. 4. 4W-7017 Injector Storage Standard

(1) Choose a suitable storage place

SHUMATT

The warehouse and cargo yard where the fuel injector is stored should be kept clean and dry, and away from the factory buildings that generate harmful gases and dust; do not mix with acid, alkali, salt and other substances; the storage place should have a good drainage system; the cargo yard should be flattened with gravel or furnace ash etc. to enhance the water permeability of the surface layer to keep the reservoir area and Car dry.

all the

(2) Strict requirements of warehousing

Strict inspections should be carried out when the fuel injectors are put into storage, the surface cleaning work should be done well to remove water traces, oil stains, ash and other dirt, remove the rust and do anti-rust treatment in time. Packaged injectors must be protected from damage.

(3) Keep the warehouse dry and preventing moisture

The relative humidity is usually below 70% for the fuel injectors placed in the room, and the corrosion of the fuel injectors is significantly reduced.

Injectors must be stored in the warehouse, and they are forbidden to store in the same warehouse with commodities with high water content.

(4) Stack Properly

and and a start a start a start . After the injector is exposed to rain, the corrosion rate will increase significantly. The purpose of sealing is to isolate the injector from rainwater and humid air, so the warehouse window should be checked in time to avoid rainwater entering the warehouse

If the fuel injector package is damaged, it should be repaired or replaced; when the package is damp, the packaging material should be dried; if the original anti-corrosion and oil applied at the factory is found to be damaged or dried up, it should be cleaned and re-applied oil in time.

It is forbidden to leave the injector exposed in the air for a long time.

It is forbidden to store acid, alkali, salt and other substances together with the injector,

A The unpacked fuel injector must be rust-proof during secondary storage.

5. Company Information was start start



Telephone: +86-755-23215133

Email: ruby@shumatt.com

Website: www.shumatt.net

Shenzhen Office: 11-12, Floor 14, Building 13, Qinchengda Building, Exit A, Honglang North Subway Station, Bao'an District, Shenzhen, China's Mainland

SPORT

Shenzhen Office: Room 428-430, Building B, Huafeng Zhigu Technology Industrial Park, Exit B, Fuyong Metro Station, Bao'an District, Shenzhen, China's Mainland

THE THE THE ATT A THE ATT AND A THE ATT AND A THE ATT AND A THE ATT A

Hong Kong Office: Jianfa Street Industrial Zone, Tuen Mun, New Territories, Hong Kong, China

58.⁵⁷⁸

Mob/Whatsapp: +86 13410541523 Email :<u>ruby@shumatt.com</u> © 2023 Shenzhen Shumatt Technology Co., Ltd • After-sales Service Address: Please contact our salesmen to obtain and provide the corresponding product maintenance reasons (Reference: <u>1.10.326-4700 Injector Warranty Instructions</u>)

5.2	. Contact Information	1	the set of the set	6	ST water				
No.	Name	WeChat/ WhatsApp	Email	Facebook	YouTube				
1	Ruby	+86-13410541523	ruby@shumatt.com	Hison Li	Hison Li				
2	lvy	+86-18025309821	sales@shumatt.com	Ivy Shumatt	Shumatt IVY				
3. ₃₀ 0	Rebecca	+86-18025349821	sales01@shumatt.com	Rebecca SHUMATT	SHUMATT Rebecca				
4	Janny	+86-18028749821	sales02@shumatt.com	Janny shumatt	Janny Shumatt				
5	Sam	+86-13316859821	Sales8@shumatt.com	Shumatt Sam	Sam Shumatt				
6	Natalie	+86- 18938945856	sales15@shumatt.com	Shumatt Natalie	Lin Natalie				
7300	Bhi Ada Bhi	+86-1342286353	sales5@shumatt.com	Shumatt Ada	Ada Shumatt				
8	Hison Li	+86-18318811871	web@shumatt.com	Hison Li	Hison Li				
9	Mecca	+86-18938948618	sales11@shumatt.com	Shumatt Mecca	Shumatt Mecca				
10	Peric 39	+86 18319033618	sales3@shumatt.com	All All	All de				
11	[™] Wayne [™] (Joaquín en español)	+86-13316959821	wayne@shumatt.com	shumattwayne	Wayne Shumatt				
12	Sylvia	+86 18312499884	sales6@shumatt.com	i sti	Star Sta				
de la constance	Visit http://shumatt.com to obtain the latest information of salesmen								
	PS: Shumatt's sales-men's emails are all end with @shumatt.com								

6. Copyright Statement

The copyright of any contents (including but not limited to parameters, data, text, charts, images, sounds or videos, etc.) provided in " 3300 Injector 4W-7017 Technical File" belong to Shenzhen Shumatt Technology Co., Ltd. Without the prior written permission of Shenzhen Shumatt Technology Co., Ltd., you are not allowed to modify any contents in "3300 Injector 4W-7017 Technical File" in any way. At the same time, any conditions to spread, re-post, display the contents of "3300 Injector 4W-7017 Technical File" should indicate that the cited article is from Shenzhen Shumatt Technology Co., Ltd., Any actions failure to follow above conditions to use " 3300 Injector 4W-7017 Technical File" will violate the "Copyright Law of the People's Republic of China" and other laws and regulations and the provisions of relevant international conventions.