

**9308-002E Common Rail Injector Nozzle Nut Technical File**

SKU: G1Y2016941M152



# 9308-002E Common Rail Injector Nozzle Nut Technical File

## Content

1. 9308-002E Injector Nozzle Nut Introduction.....	1
1.1. 9308-002E Injector Nozzle Nut Basic Information.....	1
1.2. 9308-002E Injector Nozzle Nut Common Part Number.....	1
1.3. 9308-002E Injector Nozzle Nut Parameter.....	1
1.4. 9308-002E Injector Nozzle Nut Specifications and Dimensions.....	1
1.5. 9308-002E Injector Nozzle Nut Quality Control.....	1
1.6. 9308-002E Injector Nozzle Nut Customized Service.....	2
1.7. 9308-002E Injector Nozzle Nut Packing List and Package Size.....	2
1.8. 9308-002E Injector Nozzle Nut Packing Testing Standard and Certificate.....	4
1.9. 9308-002E Injector Nozzle Nut Warranty Instructions.....	4
1.10. 9308-002E Injector Nozzle Nut Manufacturer.....	5
2. 9308-002E Injector Nozzle Nut Technical Support.....	5
2.1. 9308-002E Injector Nozzle Nut Installation Utilized Location.....	5
2.2. 9308-002E Injector Nozzle Nut Installation.....	6
2.3. 9308-002E Injector Nozzle Nut Not Working Normally.....	7
2.4. 9308-002E Injector Nozzle Nut Causes of Being Damaged.....	7
2.5. 9308-002E Injector Nozzle Nut Technical Support Obtaining Methods.....	8
2.6. 9308-002E Injector Nozzle Nut Measurement Tool.....	8
2.7. 9308-002E Injector Nozzle Nut Measurement Steps.....	9
3. 9308-002E Injector Nozzle Nut Purchase and Delivery.....	10
3.1. 9308-002E Injector Nozzle Nut Purchase Payment Term.....	10
3.2. 9308-002E Injector Nozzle Nut Main Sales Markets.....	11
3.3. 9308-002E Injector Nozzle Nut Declaration Requirements.....	11
3.4. 9308-002E Injector Nozzle Nut Shipping Ways.....	11
3.5. 9308-002E Injector Nozzle Nut Lead time.....	11
3.6. 9308-002E Injector Nozzle Nut Logistics Time for Destination Out of China's Areas.....	11
3.7. 9308-002E Injector Nozzle Nut Packing.....	12
4. 9308-002E Injector Nozzle Nut Storage Standard.....	12
5. Company Information.....	13
5.1. Company Introduction.....	14
5.2. Salesmen's Contact Information.....	14
6. Copyright Statement.....	15

## 9308-002E Common Rail Injector Nozzle Nut Technical File

### 1. 9308-002E Injector Nozzle Nut Introduction

#### 1.1. 9308-002E Injector Nozzle Nut Basic Information

Title	9308-002E Injector Nozzle Nut	Quality
SKU	G1Y2016941M152	China Made New

#### 1.2. 9308-002E Injector Nozzle Nut Common Part Number

##### (1) Injector Nozzle Nut Applicable Injector Model

Injector Part Number	Injector Part Number
EJBR03101D	28232251

##### (2) Injector Nozzle Nut Application Information

Vehicle Brand	Engine Model
Nissan	1.5 dCI

##### (3) Injector Nozzle Nut Part Number Common Writing

9308-002E

#### 1.3. 9308-002E Injector Nozzle Nut Parameter

Adaptation System: **Common Rail System**

Injector Nozzle Nut Series: **CR Series**

Injector Nozzle Nut Type: **Electromagnetic**

Injector Nozzle Nut Detailed Dimensions:  **$\Phi 16.9 \times 41 \times M15.2 * 0.5$**

#### 1.4. 9308-002E Injector Nozzle Nut Specifications and Dimensions

Injector Nozzle Nut Size: **5cm\*2cm\*2cm**

Injector Nozzle Nut Net Weight: **25g**

Injector Nozzle Nut Gross Weight: **280g**

Injector Nozzle Nut Quality: **China Made New**

Injector Nozzle Nut Package Size: **16cm\* 5cm \*10cm**

Injector Nozzle Nut Type: **High Pressure Common Rail Injector Nozzle Nut**

Injector Nozzle Nut MOQ: **1pcs**

#### 1.5. 9308-002E Injector Nozzle Nut Quality Control

##### (1) Injector Nozzle Nut Testing

All injector nozzle nut spare parts are tested for electrical characteristics, accuracy, high temperature, low temperature, withstand voltage, leakage, durability, and various working conditions.

##### (2) Injector Nozzle Nut Assembling

For the quality control of injector nozzle nut production and installation, our company strictly conducts

installation per the standard installation parameters and procedures, covering the stroke test and fatigue spring test of the injector nozzle nut.

**(3) Injector Nozzle Nut Inspection**

The factory inspection of the injector nozzle nut is undergone full inspection, random inspection, and batch inspection three inspections. Different brands of test benches are used to test the same injector nozzle nut for more than three times for factory inspection, and the injector nozzle nut installation testing environment are progressed in dust-free workshop.

**1.6. 9308-002E Injector Nozzle Nut Customized Service**

**(1) Injector Nozzle Nut Customized Service:** Meet the customized needs of OEM manufacturers for shell lettering, logo engraving, injector nozzle nut internal packaging, injector nozzle nut external packaging and labels customized, etc.

	
<p>Injector Nozzle Nut Packaging</p>	<p>Color Customization: Gray, Black, White</p>

**(2) Injector Nozzle Nut Customized Service Requirements:**

The purchased of customized injector nozzle nut are not less than **10 pieces**.

Customized injector nozzle nut packages no less than **1000 pieces**.

When the customized products involve the need of specify logo, the OEM manufacturer needs to provide trademark authorization and the sample of logo image file.

**▲ Once the customized injector nozzle nut is sold, it cannot be returned or exchanged if there is no quality problems.**

**1.7. 9308-002E Injector Nozzle Nut Packing List and Package Size**

**(1) Injector Nozzle Nut Spare Parts List**

No.	1	2	3
Image			
Name	Injector Nozzle Nut Assembly	Injector Nozzle Nut Height	Injector Nozzle Nut Outer Diameter

<b>Description</b>	Injector nozzle nut part number: 9308-002E	Height: 41mm	Outer diameter: 16.9mm
<b>No.</b>	4	5	/
<b>Image</b>			/
<b>Name</b>	Injector Nozzle Nut Inside Diameter	Injector Nozzle Nut Lining	/
<b>Description</b>	Inside diameter M15.2*0.5	Prevent bumping damage to the injector nozzle nut	/

⚠ Minors are prohibited from using injector nozzle nut assemblies, desiccant and VCI rust-proof bags to prevent personal injury.

⚠ O-rings, desiccants, and VCI rust-proof bags are disposable installation accessories and need to be replaced upon re-installation.

⚠ VCI rust-proof bags and desiccant are made of non-degradable materials and should be disposed of properly after use.

⚠ When installing the injector nozzle nut and the connecting pipes, apply an appropriate amount of sealing oil.

**(2) Injector Nozzle Nut Packing Size**





**▲ Tips:** For products not covered by warranty, our company can provide paid maintenance services. For products after paid repaired, the same performance problem will have a free warranty period within 3 months from the date of repairing.

**(3) Injector Nozzle Nut Out of Warranty Coverage**

- ① The warranty period has expired and is not covered.
- ② Injector nozzle nut failure caused by high temperature, high pressure, humidity, rain, snow, saline-alkali soil, earthquakes, or abnormal environments.
- ③ Injector nozzle nut damage caused by unauthorized disassembly or repair by the customer.
- ④ Injector nozzle nut damage caused by human error (dropping, magnetization by a strong magnetic field, arson).
- ⑤ Injector nozzle nut failure or damage caused by issues other than the injector injector nozzle nut's design, technology, manufacturing, or quality.
- ⑥ Injector nozzle nut failure caused by system pressure exceeding the approved system pressure.
- ⑦ Injector nozzle nut failure caused by system voltage exceeding the approved voltage.
- ⑧ Injector nozzle nut failure caused by impurities (water, lead, aluminum powder, iron powder, sulfide) in the system fuel exceeding the standard requirements.
- ⑨ Injector nozzle nut failure caused by installation not following the tightening torque specified in the vehicle's engine maintenance manual (excessive or insufficient tightening torque).
- ⑩ Injector nozzle nut failure due to failure to adhere to the installation angle specified in the vehicle engine maintenance manual.
- 11 Failure to adhere to the cleaning requirements specified in the vehicle engine maintenance manual.
- 12 Failure to follow the replacement requirements for wearing parts specified in the vehicle engine maintenance manual.
- 13 Failure to adhere to the intake and exhaust system clearance requirements specified in the vehicle engine maintenance manual.
- 14 Failure to follow the replacement requirements for wearing parts in the oil system and the clearances between the oil intake system piping and the injector nozzle nut.

**1.10. 9308-002E Injector Nozzle Nut Manufacturer**

**Injector Nozzle Nut Manufacturer:** Shenzhen Shumatt Technology Co., Ltd

**2. 9308-002E Injector Nozzle Nut Technical Support**

**2.1. 9308-002E Injector Nozzle Nut Installation Utilized Location**

E.g.: See the injector nozzle nut utilized location as follows:

No.	Name
A	Injector Nozzle Nut



## 2.2. 9308-002E Injector Nozzle Nut Installation

### (1) 9308-002E Injector Nozzle Nut Installation Precautions:

① The replacement of the injector nozzle nut must strictly follow the electrical system, the approved pressure of the low-pressure fuel intake system, the approved pressure of the high-pressure fuel circuit system, and fuel system replacement consumables requirements (including the low-pressure fuel circuit system filter and the high-pressure fuel circuit) specified in the vehicle engine maintenance manual.

② Replacement of wearing parts of the fuel system, cleaning requirements for the connection between the fuel system and the injector nozzle nut, the fitting clearance of the injector nozzle nut connection, the installation angle and tightening torque of the injector nozzle nut, the fitting clearance of the intake system, and the fitting clearance of the exhaust system to ensure the service life of the engine and the normal operation of the injector nozzle nut.

③ When installing the injector nozzle nut on the engine, it is necessary to clean the engine block, cylinder head and other parts connected to the injector nozzle nut, and ensure that there is no dust, carbon deposits, water, rust spots, etc.

④ When installing the injector nozzle nut on the engine, please carefully check the components related to the installation of the injector nozzle nut, such as the injector nozzle nut pressure plate, screw, injector nozzle nut rod and other accessories are not deformed, and install it in strict accordance with the operation steps of the engine maintenance manual.

⑤ Without replacing new washer shim can lead to: deformation of the tight cap of nozzle, deformation of nozzle, deformation of nozzle orifice, oil leakage and air leakage, which will cause serious damage to the


injector nut and nozzle to break and cause damage to the engine.

⑥ It is forbidden to operate the bare injector nozzle nut for a long time in an environment with serious dust pollution and corrosion to iron products.

⑦ It is forbidden to operate the bare injector nozzle nut for a long time in a strong magnetic field environment.

## (2) 9308-002E Injector Nozzle Nut Tightening Torque

When installing the injector nozzle nut, the torque wrench and tightening torque data requirement must follow the injector maintenance manual. (70Nm).

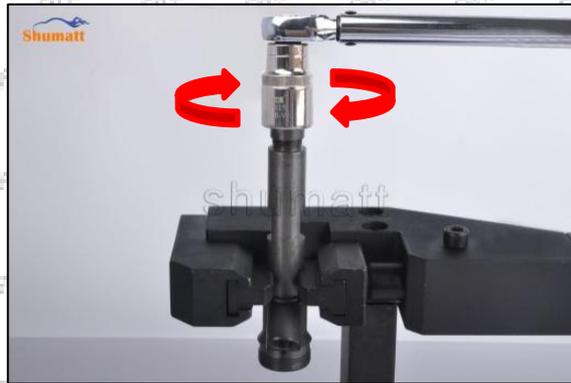

⚠ The injector nozzle nut tightening torque must be installed according to the tightening torque specified in the injector maintenance manual.

## 2.3. 9308-002E Injector Nozzle Nut Not Working Normally

- (1) There is air in the oil circuit of the engine fuel system.
- (2) Vehicle injector nozzle nut's oil supply system is not normal.
- (3) Engine common rail system oil leakage or pressure limiting valve damage.
- (4) There is a short circuit, cutting out and poor contact in the wiring harness connected to the injector nozzle nut of the vehicle.
- (5) The long-term placement of the injector nozzle nut causes the anti-rust oil to solidify, and the internal components are stuck or the oil holes are blocked.

⚠ Before installing, carefully check whether other components in the common rail system except the injector nozzle nut are damaged to prevent the injector nozzle nut from not working properly after being replaced.

## 2.4. 9308-002E Injector Nozzle Nut Causes of Being Damaged

- (1) Didn't operate properly according to engine maintenance manual during disassembly or installation, resulting in damage to the injector nozzle nut.
- (2) The fuel oil used for the vehicle does not meet the standard cause damage to the injector nozzle nut, such as: the water content in the fuel oil exceeds the standard, iron powder, aluminum powder, sulfide impurities exceed the standard, etc.
- (3) The engine is not regularly maintained according to the engine maintenance manual (please refer to the vehicle maintenance manual for the maintenance mileage). For example, failure to replace the

lubricating oil of the engine system for a long time will cause abnormal wear of the engine, excessive exhaust gas volume or a large amount of carbon deposits inside the engine. The filter is not replaced during maintenance or the replaced filter cannot reach the original filter standard. all above reasons can cause damage to the injector nozzle nut.

- (4) The abrasion of the injector nozzle nut produces iron powder and aluminum powder enter the injector nozzle nut and cause damage to the injector nozzle nut.
- (5) The deformation and abrasion of fuel tank result in iron powder or aluminum powder entering the injector nozzle nut and causing damage to the injector nozzle nut.
- (6) The injector nozzle nut is damaged due to replacement or adjustment of the relevant parts of the injector nozzle nut. For example, the valve clearance does not meet the standard after the engine is repaired, the replacement or modification of the wiring harness connected to the injector nozzle nut fails to meet the original standard.
- (7) The engine is overheated and overloaded for a long-time working result in damage to the injector nozzle nut.
- (8) The injector nozzle nut will be damaged naturally at the end of its working life.
- (9) The injector nozzle nut is magnetized (injector nozzle nut parts' magnetic exceeded) causing the injector nozzle nut to not work properly.

**▲ Before replacing the injector nozzle nut, please check the engine parts carefully according to the engine maintenance manual to avoid the injector nozzle nut being damaged again after replacement.**

## 2.5. 9308-002E Injector Nozzle Nut Technical Support Obtaining Methods

- (1) Injector Nozzle Nut Technical File , visit <http://shumatt.com> to get the technical file.
- (2) Injector Nozzle Nut Technical Videos


**Facebook:** Visit <https://www.facebook.com/hison.li> to get the technical videos, constantly follow can get more information.

**YouTube:** [https://www.youtube.com/channel/UCByvYBx7VjV\\_mAfxh\\_Hu-aw](https://www.youtube.com/channel/UCByvYBx7VjV_mAfxh_Hu-aw) to get the technical videos, constantly follow can get more information.

**Shumatt:** Visit <http://shumatt.com> to get the technical videos.

- (3) Injector Nozzle Nut Information Query Software  
TruckBook Parts EPC APP, Android/Apple App Store download and install, visit <http://shumatt.com> to get the download and installation tutorial
- (4) Search The Injector Nozzle Nut Test Data Through TruckBook Parts EPC APP.

## 2.6. 9308-002E Injector Nozzle Nut Measurement Tool

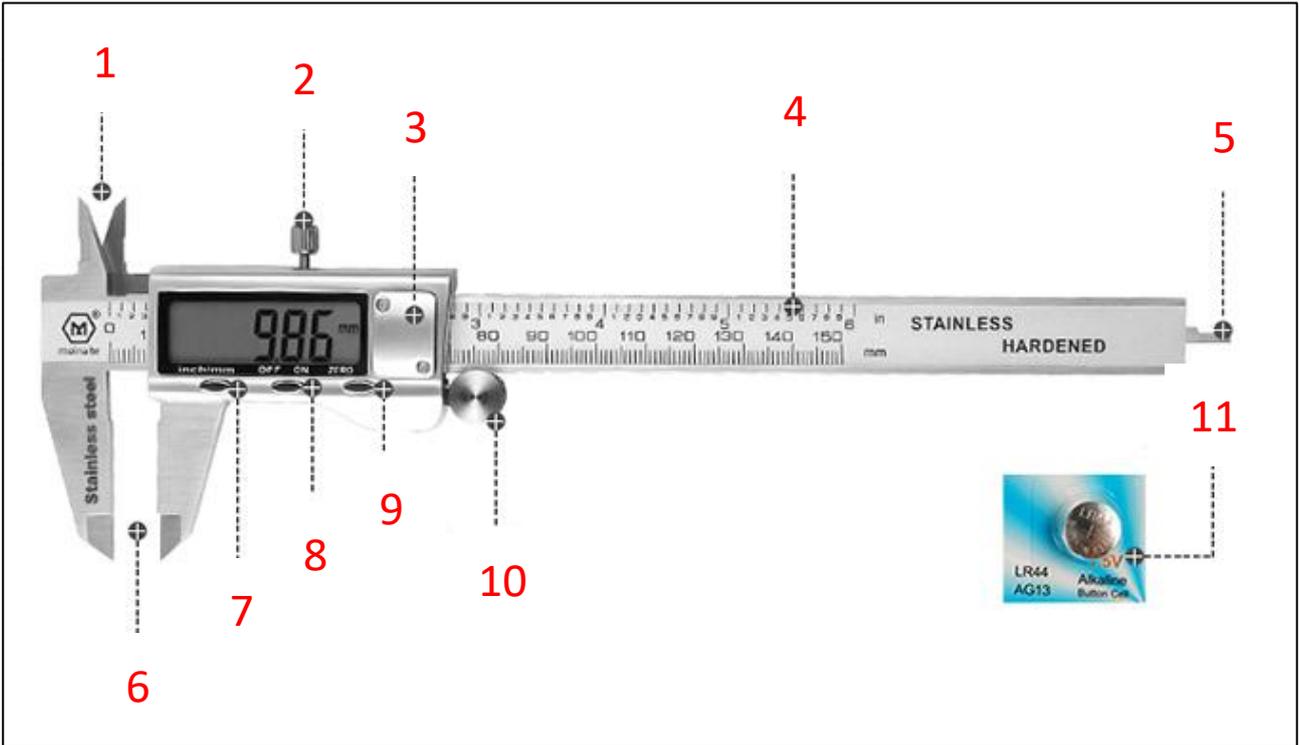

1. Inner diameter measuring claw	7. inch/mm metric and inch conversion button
2. Limit screw	8. OFF/ON power button
3. Battery installation place	9. ZERO button
4. Ruler body	10. Push roller
5. depth measurement	11. Button battery
6. depth measurement	/

### 2.7. 9308-002E Injector Nozzle Nut Measurement Steps



Picture 1 Caliper: CRT085



Picture 2 Caliper: CRT085

Step 1: Choose caliper: CRT085 (Shown in Picture 1)

Step 2: First open the caliper (OFF/ON), then return the display (ZERO) to zero (as shown in Picture 2)

▲ The caliper must be adjusted to zero before measuring.

	
<p>Picture 2</p>	<p>Picture 3</p>
<p>Step 3: Measure the height of the 9308-002E injector nut and place it at the position shown in the picture (Shown in Picture 3)</p> <p>▲The value must be return to 0 before measuring, then the measured value is correct based on the nozzle nut is tightened by the caliper. Do not place it tilted.</p>	<p>Step 4: Measure the outer diameter of the 9308-002E injector nut and place it at the position shown in the Picture (Shown in Picture 5)</p> <p>▲The value must be return to 0 before measuring, then the measured value is correct based on the injector nut is tightened by the caliper. Do not place it tilted.</p>
	
<p>Picture 4</p>	<p>Picture 5</p>
<p>Step 5: Measure the inner diameter of the 9308-002E injector nut and place it at the position shown in the Picture (Shown in Picture 5)</p> <p>▲The value must be return to 0 before measuring, then the measured value is correct based on the nozzle nut is tightened by the caliper. Do not place it tilted.</p>	<p>Step 6: Measure the hexagonal edge-to-edge diameter of the 9308-002E injector nut and place it at the position shown in the Picture (Shown in Picture 6)</p> <p>▲The value must be return to 0 before measuring, then the measured value is correct based on the nozzle nut is tightened by the caliper. Do not place it tilted.</p>

### 3. 9308-002E Injector Nozzle Nut Purchase and Delivery

#### 3.1. 9308-002E Injector Nozzle Nut Purchase Payment Term

Payment Terms: T/T, PayPal, Alipay, WeChat

▲ Please contact our salesmen for specific payment information.

**3.2. 9308-002E Injector Nozzle Nut Main Sales Markets**

Injector nozzle nut main sales markets: Asia, Europe, North America, South America, Africa etc.

**3.3. 9308-002E Injector Nozzle Nut Declaration Requirements**

Shumatt can assist customers to provide the following documents for import customs clearance: contract, invoice, packing list, bill of lading, insurance policy, certificate of origin, etc.

**3.4. 9308-002E Injector Nozzle Nut Shipping Ways**

**Destination in China areas:** SF Express, Debon Express, the corresponding logistics company can be provided according to customer requirements in special cases.

**Destinations out of China’s areas:** DHL, UPS, FedEx, TNT air, ocean or other shipping methods required by customers.

**3.5. 9308-002E Injector Nozzle Nut Lead time**

**Lead time:** Send out within 3 – 7 working days after receiving payment ( Except for special products and special cases ) .

**3.6. 9308-002E Injector Nozzle Nut Logistics Time for Destination Out of China’s Areas**

**DHL Logistics Time :**

Country or Region of Departure	Hong Kong, China	Other Countries or Regions of Asia	Australia and New Zealand	Europe	America	Other Countries
China’s Mainland	7 Days	7 Days	8 Days	8 Days	8-12 Days	7-10 Days

**UPS Logistics Time: Country or Region of Departure: China’s Mainland**

Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time
Japan	3 Days	UK	5-7Days	Egypt	5-7 Days
Turkey	5-7 Days	Singapore	3 Days	Switzerland	5-7 Days
Bahrain	5-7 Days	Latvia	7-10 Days	New Zealand	7-10 Days
Sri Lanka	5-7 Days	Thailand	3 Days	Austria	5-7 Days
Romania	5-7 Days	Vietnam	3-5 Days	Estonia	5-7 Days
Malaysia	3-5 Days	Israel	5-7 Days	Mexico	7-10 Days
France	5-7 Days	America	5-7 Days	United Arab Emirates	5-7 Days
Italy	5-7 Days	Netherlands	5-7 Days	Bengal	7-10 Days
Lebanon	5-7 Days	Philippine	3-5 Days	Greece	7-10 Days
South Korea	3 Days	Spain	5-7 Days	Myanmar	5-7 Days
Canada	5-7 Days	Germany	5-7 Days	Saudi Arabia	7-10 Days
Portugal	5-7 Days	Australia	5-7 Days	South Africa	7-10 Days

Denmark	5-7 Days	Belgium	5-7 Days	Ukraine	7-10 Days
India	7-10 Days	Qatar	7-10 Days	Poland	5-7 Days
Indonesia	3-5 Days	Morocco	7-10 Days	Pakistan	7-10 Days
Kuwait	7-10 Days	/	/	/	/

**⚠** The logistics time is for reference only , subjects are according to the actual arrival.

### 3.7. 9308-002E Injector Nozzle Nut Packing

**Domestic express packaging:** Usually wrapped in waterproof scotch tape, such as picture No.1.

**International express packaging:** Wrapped with waterproof yellow tape After wrapping the black protective film, such as picture No. 2.

**Pallet Shipping:** Use fumigation free and recycling trays that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties for the outside, such as picture No. 3, also, the products can be packaged according to customers' requirements.

**⚠** The packing tray is made of plastic and can be recycled.

**⚠** Transparent tape, yellow tape, black wrapping protective film, white wrapping protective film are non-degradable materials, please dispose of them properly.

**⚠** Minors are prohibited from using transparent tape, yellow tape, black wrapping protective film, and white wrapping protective film to avoid personal injury.

No.	1	2	3
<b>Image</b>			
<b>Name</b>	Domestic Express Packaging	International Express Packaging	Pallet Shipping
<b>Description</b>	Wrapped by transparent tape	Wrapped with yellow tape after wrapping black protective film	Use pallet that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties

### 4. 9308-002E Injector Nozzle Nut Storage Standard

#### (1) Choose a suitable storage place

The warehouse and cargo yard where the injector nozzle nut is stored should be kept clean and dry, and away from the factory buildings that generate harmful gases and dust; do not mix with acids, alkali, salts and

other substances; the storage place should have a good drainage system; the cargo yard should be flattened with gravel or furnace ash etc. to enhance the water permeability of the surface layer to keep the reservoir area dry.

**(2) Strict requirements of warehousing**

Strict inspections should be carried out when the injector nozzle nut are put into storage, the surface cleaning work should be done well to remove water traces, oil stains, ash and other dirt, remove the rust and do anti-rust treatment in time. Packaged injectors must be protected from damage.

**(3) Keep the warehouse dry and preventing moisture**

The relative humidity is usually below 70% for the injector nozzle nut placed in the room, and the corrosion of the injector nozzle nut are significantly reduced.

Injector nozzle nut must be stored in the warehouse, and they are forbidden to store in the same warehouse with commodities with high water content.

**(4) Stack Properly**

After the injector nozzle nut is exposed to rain, the corrosion rate will increase significantly. The purpose of sealing is to isolate the injector nozzle nut from rainwater and humid air, so the warehouse window should be checked in time to avoid rainwater entering the warehouse

If the injector nozzle nut package is damaged, it should be repaired or replaced; when the package is damp, the packaging material should be dried; if the original anti-corrosion and oil applied at the factory is found to be damaged or dried up, it should be cleaned and re-applied oil in time.

-  It is forbidden to leave the injector nozzle nut exposed in the air for a long time.
-  It is forbidden to store acid, alkali, salt and other substances together with the injector nozzle nut.
-  The unpacked injector nozzle nut must be rust-proof during secondary storage.

**5. Company Information**



### 5.1. Company Introduction

**Chinese Name:** 深圳市舒马特科技有限公司

**English Name:** Shenzhen Shumatt Technology Co., Ltd

 **Mob Phone/WeChat:** +86-13410541523

 **HK Telephone:** +852-67653519

 **Telephone:** +86-755-23215133

 **Email:** ruby@shumatt.com

 **Website:** www.shumatt.com

 **Shenzhen Office:** 11-12, Floor 14, Building 13, Qinchengda Building, Exit A, Honglang North Subway Station, Bao'an District, Shenzhen, China's Mainland

 **Shenzhen Office:** Exit C, Qiao Touxu Metro Station, NO. 66 Chongqing Road, Fuhai Avenue, Bao'an District, Shenzhen, China Mainland

 **Hong Kong Office:** Jianfa Street Industrial Zone, Tuen Mun, New Territories, Hong Kong, China

 **After-sales Service Address:** Please contact our salesmen to obtain and provide the corresponding product maintenance reasons (Reference: [1.9. 9308-002E Injector Nozzle Nut Warranty Instructions](#))

### 5.2. Salesmen's Contact Information

Mob/WhatsApp: +86 13410541523

Email : [ruby@shumatt.com](mailto:ruby@shumatt.com)

© 2026 Shenzhen Shumatt Technology Co., Ltd

Tel: +8675523215133

Website : [www.shumatt.com](http://www.shumatt.com)

No.	Name	WeChat/WhatsApp	Email
1	Ruby	+86-13410541523	ruby@shumatt.com
2	Ivy	+86-18025299821	sales@shumatt.com
3	Rebecca	+86-18025349821	sales01@shumatt.com
4	Janny	+86-18028749821	sales02@shumatt.com
5	Sam	+86-13316859821	Sales8@shumatt.com
6	Natalie	+86- 18938945856	sales15@shumatt.com
7	Ada	+86-1342286353	sales5@shumatt.com
8	Hison Li	+86-18318811871	web@shumatt.com
9	Mecca	+86-18938948618	sales11@shumatt.com
10	Eric	+86 18319033618	sales3@shumatt.com
11	Wayne ( Joaquín en español )	+86-13316959821	wayne@shumatt.com
12	Sylvia	+86 18312499884	sales6@shumatt.com
Visit <a href="http://shumatt.com">http://shumatt.com</a> to obtain the latest information of salesmen			
PS: Shumatt's salesmen's emails are all end with <b>@shumatt.com</b>			

### 6. Copyright Statement

The copyright of any contents (including but not limited to parameters, data, text, charts, images, sounds or videos, etc.) provided in "9308-002E Injector Nozzle Nut Technical File" belong to Shenzhen Shumatt Technology Co., Ltd. Without the prior written permission of Shenzhen Shumatt Technology Co., Ltd., you are not allowed to modify any contents in "9308-002E Common Rail Injector Nozzle Nut Technical File" in any way. At the same time, any conditions to spread, repost, display the contents of "9308-002E Common Rail Injector Nozzle Nut Technical File" should indicate that the cited article is from Shenzhen Shumatt Technology Co., Ltd., Any actions failure to follow above conditions to use "9308-002E Common Rail Injector Nozzle Nut Technical File" will violate the "Copyright Law of the People's Republic of China" and other laws and regulations and the provisions of relevant international conventions.