

**120-2007A Nozzle Spring Pressure Adjustment Shim Technical File**

SKU: G1W10C13C15C18A



## 120-2007A Nozzle Spring Pressure Adjustment Shim Technical File

### Content

|                                                                                                                 |   |
|-----------------------------------------------------------------------------------------------------------------|---|
| 1. 120-2007A Nozzle Spring Pressure Adjustment Shim Introduction .....                                          | 1 |
| 1.1. 120-2007A Nozzle Spring Pressure Adjustment Shim Basic Information .....                                   | 1 |
| 1.2. 120-2007A Nozzle Spring Pressure Adjustment Shim Common Part Number .....                                  | 1 |
| 1.3. 120-2007A Nozzle Spring Pressure Adjustment Shim Specifications and Dimensions .....                       | 1 |
| 1.4. 120-2007A Nozzle Spring Pressure Adjustment Shim Quality Control .....                                     | 1 |
| 1.5. 120-2007A Nozzle Spring Pressure Adjustment Shim Customized Service .....                                  | 2 |
| 1.6. 120-2007A Nozzle Spring Pressure Adjustment Shim Packing List and Package Size .....                       | 2 |
| 1.7. 120-2007A Nozzle Spring Pressure Adjustment Shim Warranty Instructions .....                               | 3 |
| 1.8. 120-2007A Nozzle Spring Pressure Adjustment Shim Manufacturer .....                                        | 4 |
| 2. 120-2007A Nozzle Spring Pressure Adjustment Shim Technical Support .....                                     | 4 |
| 2.1. 120-2007A Nozzle Spring Pressure Adjustment Shim Clean .....                                               | 4 |
| 2.2. 120-2007A Nozzle Spring Pressure Adjustment Shim Causes of Being Damaged .....                             | 4 |
| 2.3. 120-2007A Nozzle Spring Pressure Adjustment Shim Technical Support Obtaining Methods .....                 | 5 |
| 3. 120-2007A Nozzle Spring Pressure Adjustment Shim Purchase and Delivery .....                                 | 5 |
| 3.1. 120-2007A Nozzle Spring Pressure Adjustment Shim Purchase Payment Term .....                               | 5 |
| 3.2. 120-2007A Nozzle Spring Pressure Adjustment Shim Main Sales Markets .....                                  | 5 |
| 3.3. 120-2007A Nozzle Spring Pressure Adjustment Shim Declaration Requirements .....                            | 5 |
| 3.4. 120-2007A Nozzle Spring Pressure Adjustment Shim Shipping Ways .....                                       | 5 |
| 3.5. 120-2007A Nozzle Spring Pressure Adjustment Shim Lead time .....                                           | 6 |
| 3.6. 120-2007A Nozzle Spring Pressure Adjustment Shim Logistics Time for Destination Out of China's Areas ..... | 6 |
| 3.7. 120-2007A Nozzle Spring Pressure Adjustment Shim Packing .....                                             | 7 |
| 4. 120-2007A Nozzle Spring Pressure Adjustment Shim Storage Standard .....                                      | 7 |
| 5. Company Information .....                                                                                    | 8 |
| 5.1. Company Introduction .....                                                                                 | 8 |
| 5.2. Salesmen's Contact Information .....                                                                       | 9 |
| 6. Copyright Statement .....                                                                                    | 9 |

## 120-2007A Nozzle Spring Pressure Adjustment Shim Technical File

### 1. 120-2007A Nozzle Spring Pressure Adjustment Shim Introduction

#### 1.1. 120-2007A Nozzle Spring Pressure Adjustment Shim Basic Information

| Title | 120-2007A Nozzle Spring Pressure Adjustment Shim | Quality        |
|-------|--------------------------------------------------|----------------|
| SKU   | G1W10C13C15C18A                                  | China Made New |

#### 1.2. 120-2007A Nozzle Spring Pressure Adjustment Shim Common Part Number

##### (1) Nozzle Spring Pressure Adjustment Shim Applicable Injector Model

| Injector Part Number | Replacement Part Number | OEM |
|----------------------|-------------------------|-----|
| /                    | /                       | /   |

##### (2) Nozzle Spring Pressure Adjustment Shim Application Information

| Vehicle/Equipment (Initial Part Install) | Manufacturer |
|------------------------------------------|--------------|
| /                                        | /            |

##### (3) Nozzle Spring Pressure Adjustment Shim Part Number Common Writing

120-2007A

#### 1.3. 120-2007A Nozzle Spring Pressure Adjustment Shim Specifications and Dimensions

Nozzle Spring Pressure Adjustment Shim Size : /

Nozzle Spring Pressure Adjustment Shim Net Weight : 22g

Nozzle Spring Pressure Adjustment Shim Package Size : 14cm \*7cm \*3cm

Nozzle Spring Pressure Adjustment Shim Package Weight : 110g

Nozzle Spring Pressure Adjustment Shim Quality : China Made New

Nozzle Spring Pressure Adjustment Shim MOQ : 50pcs

#### 1.4. 120-2007A Nozzle Spring Pressure Adjustment Shim Quality Control

##### (1) Nozzle Spring Pressure Adjustment Shim Testing

All nozzle spring pressure adjustment shim spare parts are tested for electrical characteristics, accuracy, high temperature, low temperature, withstand voltage, leakage, durability, and various working conditions.

##### (2) Nozzle Spring Pressure Adjustment Shim Inspection

The factory inspection of the nozzle spring pressure adjustment shim is undergone full inspection, random inspection, and batch inspection three inspections. Different brands of test benches are used to test the same nozzle spring pressure adjustment shim for more than three times for factory inspection, and the nozzle spring pressure adjustment shim installation testing environment are progressed in dust-free workshop.

##### (3) Nozzle Spring Pressure Adjustment Shim Assembling

For the quality control of nozzle spring pressure adjustment shim production and installation, our company strictly conducts installation per the standard installation parameters and procedures, covering the

stroke test and fatigue spring test of the nozzle spring pressure adjustment shim.

## 1.5. 120-2007A Nozzle Spring Pressure Adjustment Shim Customized Service

**(1) Nozzle Spring Pressure Adjustment Shim Customized Service:** Meet the customized needs of OEM manufacturers for shell lettering, logo engraving, nozzle spring pressure adjustment shim internal packaging, nozzle spring pressure adjustment shim external packaging and labels customized, etc.

### (2) Nozzle Spring Pressure Adjustment Shim Customized Service Requirements:

Custom engraved or unengraved nozzle caps: Minimum order quantity (MOQ): **100 pcs**.

Custom injector nozzle cap barrels: MOQ: **2,000 – 3,000 pcs**.

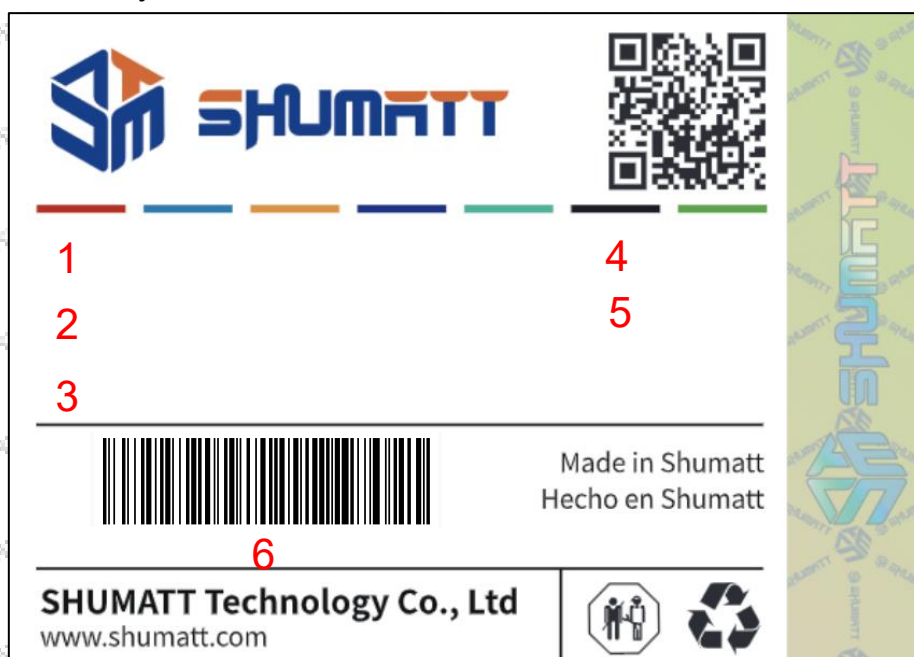
Custom packaging boxes for nozzle caps: MOQ: **1,000 boxes**.

For customized products featuring a specified logo, the OEM customer must provide proof of trademark authorization and a sample logo image file.

**▲ Once the customized nozzle spring pressure adjustment shim is sold, it cannot be returned or exchanged if there is no quality problems.**

### (3) Nozzle Spring Pressure Adjustment Shim Label Printing Format Requirements:

#### Nozzle Spring Pressure Adjustment Shim Information



| No. | Description                                        | Specification   |
|-----|----------------------------------------------------|-----------------|
| 1   | Nozzle Spring Pressure Adjustment Shim Marking No. | 120-2007A       |
| 2   | Nozzle Spring Pressure Adjustment Shim Order No.   | /               |
| 3   | Applicable Injector                                | /               |
| 4   | Packing Quantity                                   | 50Pcs           |
| 5   | Series                                             | C13/C15/C18     |
| 6   | SKU Code                                           | G1W10C13C15C18A |

## 1.6. 120-2007A Nozzle Spring Pressure Adjustment Shim Packing List and Package Size

Mob/WhatsApp: +86 13410541523



Email : [ruby@shumatt.com](mailto:ruby@shumatt.com)

© 2026 Shenzhen Shumatt Technology Co., Ltd

Tel: +8675523215133

Website : [www.shumatt.com](http://www.shumatt.com)

**(1) Nozzle Spring Pressure Adjustment Shim Spare Parts List**

| No.         | 1                                                                                 | 2                                                                                 | 3                                                                                   |
|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Image       |  |  |  |
| Name        | Nozzle Spring Pressure Adjustment Shim                                            | Nozzle Spring Pressure Adjustment Shim Specifications                             | Nozzle Spring Pressure Adjustment Shim Package Box                                  |
| Description | Nozzle Spring Pressure Adjustment Shim Part Number:<br><b>120-2007A</b>           | Diameter: 10mm<br>Thickness: 2.40 – 2.60 mm<br>Precision: 0.02 mm per increment   | Install the nozzle spring pressure adjustment shim.                                 |

⚠ Keep the nozzle spring pressure adjustment shim assembly, storage container, and packaging box out of reach of children to prevent injury.

⚠ The nozzle spring pressure adjustment shim packaging box is reusable; the components are not reusable.

⚠ The nozzle spring pressure adjustment shim container is made of non-biodegradable material. Dispose of it properly after use.

**1.7. 120-2007A Nozzle Spring Pressure Adjustment Shim Warranty Instructions**

**(1) Product Warranty Conditions and Instructions**

It is necessary to provide pictures, videos, or test reports detected by the nozzle spring pressure adjustment shim inspection equipment when the nozzle spring pressure adjustment shim is abnormal during use as evidence to feed back to the salesman.

Abnormal conditions are properly explained such as: 1.Smoke, 2. Engine shake, 3. Difficulty starting the engine, 4. Engine noise, 5. oil leakage etc.

**(2) Nozzle Spring Pressure Adjustment Shim Warranty Coverage**

If a performance failure occurs within 15 days of receiving the nozzle spring pressure adjustment shim 120-2007A, and the product is not visually damaged, the customer may choose to exchange it.

If a performance problem occurs with the nozzle spring pressure adjustment shim 120-2007A during the warranty period (3 months), and testing confirms a product defect, the customer can contact our sales staff for a free replacement of the same model.

If the product is confirmed to be without fault, it will be returned in its original condition.

**(3) Nozzle Spring Pressure Adjustment Shim Out of Warranty Coverage**

① The warranty period has expired and is not covered.

② Nozzle spring pressure adjustment shim failure caused by high temperature, high pressure, humidity, rain, snow, saline-alkali soil, earthquakes, or abnormal environments.

- ③ Nozzle spring pressure adjustment shim damage caused by human error (dropping, magnetization by a strong magnetic field, arson).
- ④ Nozzle spring pressure adjustment shim failure or damage caused by issues other than the injector nozzle spring pressure adjustment shim's design, technology, manufacturing, or quality.
- ⑤ Nozzle spring pressure adjustment shim failure caused by system voltage exceeding the approved voltage.
- ⑥ Nozzle spring pressure adjustment shim failure caused by impurities (water, lead, aluminum powder, iron powder, sulfide) in the system fuel exceeding the standard requirements.
- ⑦ Nozzle spring pressure adjustment shim failure caused by installation not following the tightening torque specified in the vehicle's engine maintenance manual (excessive or insufficient tightening torque).
- ⑧ Nozzle spring pressure adjustment shim failure due to failure to adhere to the installation angle specified in the vehicle engine maintenance manual.
- ⑨ Failure to adhere to the cleaning requirements specified in the vehicle engine maintenance manual.
- ⑩ Failure to follow the replacement requirements for wearing parts specified in the vehicle engine maintenance manual.

### 1.8. 120-2007A Nozzle Spring Pressure Adjustment Shim Manufacturer

Nozzle Spring Pressure Adjustment Shim Manufacturer: Shenzhen Shumatt Technology Co., Ltd

## 2. 120-2007A Nozzle Spring Pressure Adjustment Shim Technical Support

### 2.1. 120-2007A Nozzle Spring Pressure Adjustment Shim Clean

(1) Before installation, the air gap adjusting shim should be cleaned in an ultrasonic cleaner for 3-5 minutes to remove stains, dust, powder, rust-preventive oil oxides, paraffin bases, naphthenic bases, intermediate bases, salts, lead naphthenate, zinc naphthenate, sodium petroleum sulfonate, barium petroleum sulfonate, calcium petroleum sulfonate, trioleic tallow diamine, and rosin amine adhering to its surface.

(2) Use compressed air to remove the cleaning solution adhering to the surface of the nozzle nut after cleaning, ensuring it meets the usage standards.

### 2.2. 120-2007A Nozzle Spring Pressure Adjustment Shim Causes of Being Damaged

(1) Nozzle spring pressure adjustment shim failure due to impurities (water, lead, aluminum powder, iron powder, sulfides) in the fuel exceeding standard requirements.

(2) Normal wear of the nozzle nut due to prolonged high-temperature operation.

(3) Wear of the nozzle nut needle causing blockage of the oil orifice, resulting in insufficient fuel injection and inability of the injector to function properly.

⚠ Wear of the nozzle nut needle causing blockage of the oil orifice, resulting in insufficient fuel injection and inability of the injector to function properly.

⚠ Wear of the nozzle nut 120-2007A causes increased fuel injection, leading to black smoke from the vehicle, and in severe cases, inability of the injector to function properly.

⚠ If the nozzle nut needle cannot be stably... Stuck motion can severely damage the air gap adjusting shim.

- ⚠ Rust on the nozzle nut spring can lead to spring breakage, causing black smoke from the vehicle.
- ⚠ Wearing of the nozzle nut spring adjusting shim reduces the opening pressure of the nozzle nut, increasing the fuel injection volume and causing black smoke; in severe cases, it can prevent the injector from functioning properly.
- ⚠ Wearing of the nozzle nut needle valve lift adjusting shim increases the needle valve stroke of the nozzle nut, increasing the fuel injection volume and causing black smoke; in severe cases, it can prevent the injector from functioning properly.
- ⚠ Prolonged high-temperature, high-intensity operation can cause the nozzle nut head to crack.

### 2.3. 120-2007A Nozzle Spring Pressure Adjustment Shim Technical Support Obtaining Methods

- (1) Nozzle Spring Pressure Adjustment Shim Technical File , visit <http://shumatt.com> to get the technical file.
- (2) Nozzle Spring Pressure Adjustment Shim Technical Videos

**Facebook:** Visit <https://www.facebook.com/hison.li> to get the technical videos, constantly follow can get more information.

**YouTube:** [https://www.youtube.com/channel/UCByvVBx7VjV\\_mAfxh\\_Hu-aw](https://www.youtube.com/channel/UCByvVBx7VjV_mAfxh_Hu-aw) to get the technical videos, constantly follow can get more information.

**Shumatt:** Visit <http://shumatt.com> to get the technical videos.

- (3) Nozzle Spring Pressure Adjustment Shim Information Query Software  
Truck Book Parts EPC APP, Android/Apple App Store download and install, visit <http://shumatt.com> to get the download and installation tutorial
- (4) Search The Nozzle Spring Pressure Adjustment Shim Test Data Through Truck Book Parts EPC APP.

## 3. 120-2007A Nozzle Spring Pressure Adjustment Shim Purchase and Delivery

### 3.1. 120-2007A Nozzle Spring Pressure Adjustment Shim Purchase Payment Term

**Payment Terms:** T/T, PayPal, Alipay, WeChat

- ⚠ Please contact our salesmen for specific payment information.

### 3.2. 120-2007A Nozzle Spring Pressure Adjustment Shim Main Sales Markets

Nozzle spring pressure adjustment shim main sales markets: Asia, Europe, North America, South America, Africa etc.

### 3.3. 120-2007A Nozzle Spring Pressure Adjustment Shim Declaration Requirements

Shumatt can assist customers to provide the following documents for import customs clearance: contract, invoice, packing list, bill of lading, insurance policy, certificate of origin, etc.

### 3.4. 120-2007A Nozzle Spring Pressure Adjustment Shim Shipping Ways

**Destination in China areas:** SF Express, Debon Express, the corresponding logistics company can be provided according to customer requirements in special cases.

**Destinations out of China's areas:** DHL, UPS, FedEx, TNT air, ocean or other shipping methods required by

customers.

### 3.5. 120-2007A Nozzle Spring Pressure Adjustment Shim Lead time

**Lead time:** Send out within 3 – 7 working days after receiving payment ( Except for special products and special cases ) .

### 3.6. 120-2007A Nozzle Spring Pressure Adjustment Shim Logistics Time for Destination Out of China's Areas

**DHL Logistics Time :**

| Country or Region of Departure | Hong Kong, China | Other Countries or Regions of Asia | Australia and New Zealand | Europe | America   | Other Countries |
|--------------------------------|------------------|------------------------------------|---------------------------|--------|-----------|-----------------|
| China's Mainland               | 7 Days           | 7 Days                             | 8 Days                    | 8 Days | 8-12 Days | 7-10 Days       |

**UPS Logistics Time: Country or Region of Departure: China's Mainland**

| Country of Destination | Estimated Arrival Time | Country of Destination | Estimated Arrival Time | Country of Destination | Estimated Arrival Time |
|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| Japan                  | 3 Days                 | UK                     | 5-7Days                | Egypt                  | 5-7 Days               |
| Turkey                 | 5-7 Days               | Singapore              | 3 Days                 | Switzerland            | 5-7 Days               |
| Bahrain                | 5-7 Days               | Latvia                 | 7-10 Days              | New Zealand            | 7-10 Days              |
| Sri Lanka              | 5-7 Days               | Thailand               | 3 Days                 | Austria                | 5-7 Days               |
| Romania                | 5-7 Days               | Vietnam                | 3-5 Days               | Estonia                | 5-7 Days               |
| Malaysia               | 3-5 Days               | Israel                 | 5-7 Days               | Mexico                 | 7-10 Days              |
| France                 | 5-7 Days               | America                | 5-7 Days               | United Arab Emirates   | 5-7 Days               |
| Italy                  | 5-7 Days               | Netherlands            | 5-7 Days               | Bengal                 | 7-10 Days              |
| Lebanon                | 5-7 Days               | Philippine             | 3-5 Days               | Greece                 | 7-10 Days              |
| South Korea            | 3 Days                 | Spain                  | 5-7 Days               | Myanmar                | 5-7 Days               |
| Canada                 | 5-7 Days               | Germany                | 5-7 Days               | Saudi Arabia           | 7-10 Days              |
| Portugal               | 5-7 Days               | Australia              | 5-7 Days               | South Africa           | 7-10 Days              |
| Denmark                | 5-7 Days               | Belgium                | 5-7 Days               | Ukraine                | 7-10 Days              |
| India                  | 7-10 Days              | Qatar                  | 7-10 Days              | Poland                 | 5-7 Days               |
| Indonesia              | 3-5 Days               | Morocco                | 7-10 Days              | Pakistan               | 7-10 Days              |
| Kuwait                 | 7-10 Days              | /                      | /                      | /                      | /                      |



The logistics time is for reference only , subjects are according to the actual arrival.

Mob/WhatsApp: +86 13410541523

Email : [ruby@shumatt.com](mailto:ruby@shumatt.com)

© 2026 Shenzhen Shumatt Technology Co., Ltd

Tel: +8675523215133

Website : [www.shumatt.com](http://www.shumatt.com)

### 3.7. 120-2007A Nozzle Spring Pressure Adjustment Shim Packing

**Domestic express packaging:** Usually wrapped in waterproof scotch tape, such as picture No.1.

**International express packaging:** Wrapped with waterproof yellow tape After wrapping the black protective film, such as picture No. 2.

**Pallet Shipping:** Use fumigation free and recycling trays that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties for the outside, such as picture No. 3, also, the products can be packaged according to customers' requirements.

⚠ The packing tray is made of plastic and can be recycled.

⚠ Transparent tape, yellow tape, black wrapping protective film, white wrapping protective film are non-degradable materials, please dispose of them properly.

⚠ Minors are prohibited from using transparent tape, yellow tape, black wrapping protective film, and white wrapping protective film to avoid personal injury.

| No.         | 1                                                                                  | 2                                                                                   | 3                                                                                                                 |
|-------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| Image       |  |  |                               |
| Name        | Domestic Express Packaging                                                         | International Express Packaging                                                     | Pallet Shipping                                                                                                   |
| Description | Wrapped by transparent tape                                                        | Wrapped with yellow tape after wrapping black protective film                       | Use pallet that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties |

### 4. 120-2007A Nozzle Spring Pressure Adjustment Shim Storage Standard

#### (1) Choose a suitable storage place

The warehouse and cargo yard where the air gap adjusting shim is stored should be kept clean and dry, and away from the factory buildings that generate harmful gases and dust; do not mix with acids, alkali, salts and other substances; the storage place should have a good drainage system; the cargo yard should be flattened with gravel or furnace ash etc. to enhance the water permeability of the surface layer to keep the reservoir area dry.

#### (2) Strict requirements of warehousing

Strict inspections should be carried out when the air gap adjusting shim are put into storage, the surface cleaning work should be done well to remove water traces, oil stains, ash and other dirt, remove the rust and do anti-rust treatment in time. Packaged injectors must be protected from damage.

### (3) Keep the warehouse dry and preventing moisture

The relative humidity is usually below 70% for the air gap adjusting shim placed in the room, and the corrosion of the air gap adjusting shim are significantly reduced.

Nozzle spring pressure adjustment shim must be stored in the warehouse, and they are forbidden to store in the same warehouse with commodities with high water content.

### (4) Stack Properly

After the nozzle spring pressure adjustment shim is exposed to rain, the corrosion rate will increase significantly. The purpose of sealing is to isolate the nozzle spring pressure adjustment shim from rainwater and humid air, so the warehouse window should be checked in time to avoid rainwater entering the warehouse

If the nozzle spring pressure adjustment shim package is damaged, it should be repaired or replaced; when the package is damp, the packaging material should be dried; if the original anti-corrosion and oil applied at the factory is found to be damaged or dried up, it should be cleaned and re-applied oil in time.

⚠ It is forbidden to leave the nozzle spring pressure adjustment shim exposed in the air for a long time.

⚠ It is forbidden to store acid, alkali, salt and other substances together with the nozzle spring pressure adjustment shim.

⚠ The unpacked nozzle spring pressure adjustment shim must be rust-proof during secondary storage.

## 5. Company Information



### 5.1. Company Introduction

**Chinese Name:** 深圳市舒马特科技有限公司

**English Name:** Shenzhen Shumatt Technology Co., Ltd

 **Mob Phone/WeChat:** +86-13410541523

 **HK Telephone:** +852-67653519

 **Telephone:** +86-755-23215133

 **Email:** ruby@shumatt.com

 **Website:** www.shumatt.com

 **Shenzhen Office:** 11-12, Floor 14, Building 13, Qinchengda Building, Exit A, Honglang North Subway Station, Bao'an District, Shenzhen, China's Mainland

 **Shenzhen Office:** Exit C, Qiao Touxu Metro Station, NO. 66 Chongqing Road, Fuhai Avenue, Bao'an District, Shenzhen, China Mainland

 **Hong Kong Office:** Jianfa Street Industrial Zone, Tuen Mun, New Territories, Hong Kong, China

 **After-sales Service Address:** Please contact our salesmen to obtain and provide the corresponding product maintenance reasons (Reference: [1.7. 120-2007A Nozzle Spring Pressure Adjustment Shim Warranty Instructions](#))

## 5.2. Salesmen's Contact Information

| No.                                                                                                    | Name                         | WeChat/WhatsApp  | Email               |
|--------------------------------------------------------------------------------------------------------|------------------------------|------------------|---------------------|
| 1                                                                                                      | Ruby                         | +86-13410541523  | ruby@shumatt.com    |
| 2                                                                                                      | Ivy                          | +86-18025299821  | sales@shumatt.com   |
| 3                                                                                                      | Rebecca                      | +86-18025349821  | sales01@shumatt.com |
| 4                                                                                                      | Janny                        | +86-18028749821  | sales02@shumatt.com |
| 5                                                                                                      | Sam                          | +86-13316859821  | Sales8@shumatt.com  |
| 6                                                                                                      | Natalie                      | +86- 18938945856 | sales15@shumatt.com |
| 7                                                                                                      | Ada                          | +86-1342286353   | sales5@shumatt.com  |
| 8                                                                                                      | Hison Li                     | +86-18318811871  | web@shumatt.com     |
| 9                                                                                                      | Mecca                        | +86-18938948618  | sales11@shumatt.com |
| 10                                                                                                     | Eric                         | +86 18319033618  | sales3@shumatt.com  |
| 11                                                                                                     | Wayne ( Joaquín en español ) | +86-13316959821  | wayne@shumatt.com   |
| 12                                                                                                     | Sylvia                       | +86 18312499884  | sales6@shumatt.com  |
| Visit <a href="http://shumatt.com">http://shumatt.com</a> to obtain the latest information of salesmen |                              |                  |                     |
| <b>PS:</b> Shumatt's sales men's emails are all end with <b>@shumatt.com</b>                           |                              |                  |                     |

## 6. Copyright Statement

The copyright in all content (including but not limited to parameters, data, text, charts, images, audio,

and video) contained in the “120-2007A Nozzle Spring Pressure Adjustment Shim Technical File” is owned by Shenzhen Shumatt Technology Co., Ltd. No content in the “120-2007A Nozzle Spring Pressure Adjustment Shim Technical File” may be modified in any form without the prior written consent of Shenzhen Shumatt Technology Co., Ltd. Any distribution, reproduction, or display of its content must clearly identify Shenzhen Shumatt Technology Co., Ltd. as the source. Any unauthorized use of the “120-2007A Nozzle Spring Pressure Adjustment Shim Technical File” may constitute a violation of the “Copyright Law of the People’s Republic of China”, other applicable laws and regulations, and relevant international conventions.